

## OUR SERVICES

- Provision of Solar Modules and Solar Power Systems
- Systems Solutions & Consultancy
- Systems Installation Services

## CONTACTS

Sales & Marketing:

[sales@topscm.us](mailto:sales@topscm.us)

Customer Service:

[cust@topscm.us](mailto:cust@topscm.us)

Technical Support:

[tech@topscm.us](mailto:tech@topscm.us)

## Helios-series Solar Module

A solar module is an essential part of a Solar Power System, regardless of a Grid-connected System or Off-grid System. Hence, it is crucial that performance, safety, reliability must be considered factors when choosing a solar module.

The Helios-series Solar Module offers a unique blend of features and innovative technologies yielding a product with excellent performance and quality that makes it a safe and reliable choice.

Helios-series Solar Module – an ideal investment choice that reaps returns.



## Features

- High efficiency and reliable solar cells ensure best performance
- Excellent output power under high temperature operation

## Quality

- Advanced EVA encapsulation system with triple-layer backsheet meets the most stringent safety requirements for HV operation
- Anodized AL frame allows modules to be mounted on various standard racking systems and to withstand harsh conditions
- Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells
- Innovative, environmentally-friendly packing method ensures modules arrive in good condition
- New frame design incorporating hexagonal shaped drainage holes offers flexible installation

## Benefits

- Manufactured in an ISO9001:2000 certified facility insures quality and confidence
- Highly efficient, safe, reliable and stable performance means minimal maintenance required
- Tight tolerance of  $\pm 3\%$  in output power variation achieves optimal system performance

# Product Information

## Specifications (200 – 240 W)

Model Number	H-240/60S	H-230/60S	H-220/60S	H-210/60S	H-200/60S
Peak Power (Pmax)	240W	230W	220W	210W	200W
Cell Type	Poly Crystalline Silicon, 156mmx156mm				
Cell Configuration	60 cells in series				
Max. Power Voltage (Vmp)	29.40V	29.40V	29.00V	28.75V	28.75V
Max. Power Current (Imp)	8.16A	7.82A	7.58A	7.30A	6.95A
Open Circuit Voltage (Voc)	36.50V	36.50V	36.30V	36.00V	36.00V
Short Circuit Current (Isc)	8.50A	8.30A	8.10A	7.99A	7.71A
Max. System Voltage	DC 1000V				
Temperature Coefficient of Isc (TK Isc)	0.065 %/°C				
Temperature Coefficient of Voc (TK Voc)	- 0.346 %/°C				
Temperature Coefficient of Pmax (TK Pmax)	- 0.488 %/°C				
Normal Operating Cell Temperature	45.3 ±2°C				
Weight	19.3kg (42.6 lbs)				
Dimensions	1640x992x50mm (64.6x39.1x1.97 inch)				


Note: Specifications are obtained under the Standard Test Conditions (STCs): 1000W/m<sup>2</sup> Solar Irradiance, 15 Air Mass Index and Cell Temperature of 25°C.

### A GREEN MESSAGE


Using renewable solar energy enables us to reduce the use of fossil fuels to generate energy. Fossil fuel energy generation pollutes our environment. You are empowered to help. Do your part. Be a responsible global citizen. **SAVE GAIA.**



### PHYSICAL CHARACTERISTICS Unit:mm (inch)

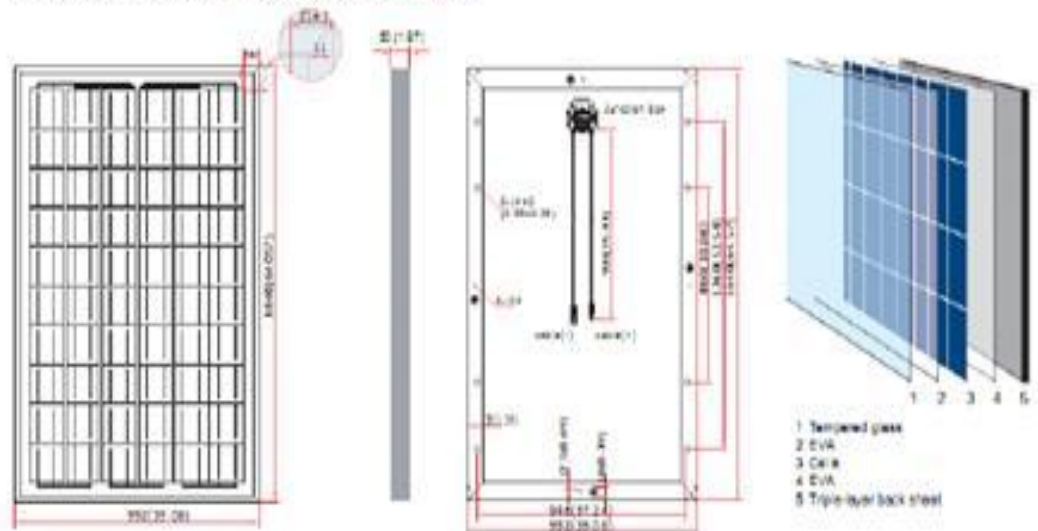

### ELECTRICAL CHARACTERISTICS

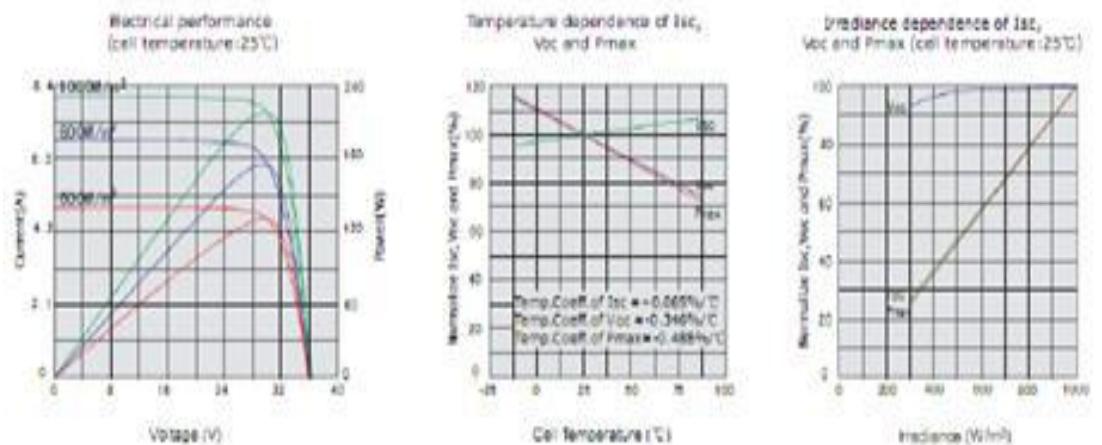

All data presented herein are general information only.

Manufacturer shall not be responsible for any data variation resulting from subsequent engineering improvements.  
© 2009, TOPSCOM TECHNOLOGY SOLUTIONS. ALL RIGHTS RESERVED.

**TOPSCOM**  
TECHNOLOGY SOLUTIONS

www.topscm-solar.com